

Programmable intrinsically submersible level transmitters

PTM/N/Ex



Version: 13.11.2013

Technical Specifications

Pressure measuring range (mH2O)

| | 1 ... 5 | > 5 ... 20 | > 20 ... 250 |
|--|---|------------------------|-----------------------|
| Overpressure | 3 bar | 3 x FS (≥ 3 bar) | 3 x FS |
| Burst pressure | > 200 bar | > 200 bar | > 200 bar |
| Accuracy, (1), (\pm % FS) | $\leq \pm 0.25$ | $\leq \pm 0.1$ | $\leq \pm 0.1$ |
| Thermal shift, (\pm % FS/$^{\circ}$C) | | | |
| Zero point 0...70 $^{\circ}$ C | ≤ 0.06 | ≤ 0.03 | ≤ 0.015 |
| Zero point -25...85 $^{\circ}$ C | ≤ 0.08 | ≤ 0.04 | ≤ 0.02 |
| Span 0...70 $^{\circ}$ C | ≤ 0.015 | ≤ 0.015 | ≤ 0.015 |
| Span -25...85 $^{\circ}$ C | ≤ 0.02 | ≤ 0.02 | ≤ 0.02 |
| Total error, (2), (3), (\pm % FS) | | | |
| -10...50 $^{\circ}$ C, (typ. / max.) | $\leq 0.15 / 0.3$ (≤ 200 mbar: 0.3 / 0.6) | $\leq 0.15 / 0.3$ | $\leq 0.15 / 0.3$ |
| -25...85 $^{\circ}$ C, (typ. / max.) | $\leq 0.65 / 0.7$ (≤ 200 mbar: 0.65 / 0.8) | $\leq 0.65 / 0.7$ | $\leq 0.55 / 0.7$ |
| Long term stability, (4) | < 0.5% FS / < 4 mbar | < 0.2% FS / < 4 mbar | < 0.1% FS / < 0.2% FS |

(1) Zero based accuracy according to DIN 16086, incl. hysteresis and repeatability at ambient temperature

(2) Total error including accuracy and temperature influences at maximum signal span (16 mA)

(3) Active compensated

(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

| | |
|------------------------------|-----------------------|
| Operating temperature | -5...80 $^{\circ}$ C |
| Process temperature | -5...80 $^{\circ}$ C |
| Storage temperature | -10...80 $^{\circ}$ C |

Electrical specifications

| | |
|--------------------------|---|
| Resolution | 0.025% FS |
| Output adjustable | |
| 4 mA | -5% FS...105% FS |
| 20 mA | -5% FS...105% FS |
| Span | 25% FS...110% FS (≥ 0.5 mH2O) |
| Low pass filter | 0.1 / 1 / 10 / 30 Hz (standard: 30 Hz) |
| Power supply | 9...28 V DC |
| Supply influence | < 0.1% FS |
| Circuit diagram | |
| Load resistance | |
| Load influence | < 0.1% FS |

ATEX Approval

| | | | |
|---|------------------------------|------------------------|------------|
| Certificate, (1) | SEV 08 ATEX 0142 | | |
| Gas | II 1G Ex ia IIC T3 / T4 / T6 | EN 60079-0 / -11 / -26 | |
| Dust | II 1D Ex iaD 20 IP6x Tx°C | EN 61241-0 / -11 | |
| Temperature class, (2) | T6 | T4 | T3 |
| Ambient temperature | -5...55 °C | -5...80 °C | -5...80 °C |
| Process temperature | -5...55 °C | -5...80 °C | -5...80 °C |
| Maximum values of the connection circuit | 30 V / 140 mA / 0.9W | | |

(1) For detailed Ex specifications see certificate and operating an safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL Approval

| | |
|-----------------------------|-------------|
| Certificate | 60332-09 HH |
| Field of application | D, F, EMC1 |

Additional approvals

| | |
|------------|-------------------|
| ABS | 09-HG436727/1-PDA |
| DNV | A-11280 |

Qualifications

| | Description | Level | Typical interferences |
|----------------------|-------------------------|---|--------------------------------|
| EN 60068-2-6 | Vibration | 4g (4...100 Hz / ± 3.2 mmpp) | |
| EN 60068-2-27 | Shock | 100g (impulse duration 6 ms) | |
| EN 55022 | Emission, class B | < 30 dBµV/m (0.03...1 GHz) | |
| EN 61000-4-2 | Electrostatic discharge | 8 kV contact 15 kV air | |
| EN 61000-4-3 | Irradiated RF | 10V/m (0.08...1 GHz) | Radio sets, wireless phones |
| EN 61000-4-4 | Transients (burst) | 4 kV | Motors, valves |
| EN 61000-4-5 | Surge | Line-Line: 0.5 kV/42 Ω Line-Earth: 1 kV/42 Ω | Lightning |
| EN 61000-4-6 | Conducted RF | 10 V (0.15...80 MHz, 3 s) | Frequency converters |

Physical specifications

| | |
|------------------|--|
| Materials | |
| Transducer | Stainless steel (316L / 1.4435), titanium (Gr. 2), (1) |
| Housing | Stainless steel (316L / 1.4404), titanium (Gr. 2) |
| Seals | Viton (standard), EPDM, Kalrez |
| Cable | PUR, FEP |

(1) Hastelloy (C-276) on request

Equipment

Overview

| | |
|------------|----------------------|
| | |
| 10.00.0091 | Accessories overview |

Interface

| | |
|--------|--------------------|
| | |
| 102442 | PTM/Ex - Interface |

Software

| | |
|--------|-------------------|
| | |
| 101224 | PC Software V1.50 |

Additional documents

Manuals

| | Article number | Description |
|------------|----------------|------------------------|
| 10.00.0079 | DEB003 | Configuration software |
| 10.00.0089 | DEB005 | User manual |

Operating and safety instructions

| | |
|------------|----------------|
| | Article number |
| 10.00.0271 | DMM023 |

Ordering information

| | | X. XXXX. | XXXX. | XX. | XXX |
|---------------------------------|--|-----------|-------|-----|-----|
| Type | PTM/N/Ex | 48 | | | |
| Pressure type | Gauge | 1 | | | |
| | Absolute (vacuum) | 2 | | | |
| Pressure measuring range | 100 mbar...25 bar | XX | | | |
| | Offset, special adjustment | 99 | | | |
| Process connection | Closed (Fig. 1) | 55 | | | |
| | Closed, 1.4435 (Fig. 1) | 59 | | | |
| | Open (Fig. 2) | 56 | | | |
| | G 1/4 M (Fig. 3) | 11 | | | |
| | G 1/2 M (Fig. 3) | 13 | | | |
| | Customized | 99 | | | |
| Electrical connection | PUR cable, blue, IP 68, (2), (3) | | 17 | | |
| | FEP cable, blue, IP 68, (2) | | 22 | | |
| | PVC cable (ACS certified), blue | | 14 | | |
| Output signal | 4...20 mA | | 05 | | |
| | 4...20 mA with overvoltage protection | | 08 | | |
| Accuracy | ≤ ± 0.25 % FS (> 500 mbar) | | | 1 | |
| | ≤ ± 0.1 % FS (≤ 500 mbar) | | | 2 | |
| Temperature range | T6 (Ta: -5...50 °C) -5...50 °C compensated (allowed process temperature: -5...50°C) | | | 3 | |
| | T4 (Ta: -5...80 °C) -5...80 °C compensated (allowed process temperature: -5...80°C) | | | 5 | |
| | T4 (Ta: -5...50 °C) -5...80 °C compensated (allowed process temperature: -5...50°C) | | | 4 | |
| Option 1 | Special oil filling: Anderol Food (for food applications) | | | | G |
| | Cutting ring connection G 1/2 M | | | | |
| | Strain relief | | | | |
| Option 2 | | | | | |
| Option 3 | Ballast weight 1.4435 | | | | B |
| | Active compensated | | | | E |
| | Version titanium (without ballast weight) | | | | K |
| | Seals: Viton (standard) | | | | U |
| | Seals: EPDM | | | | S |
| | Seals: Kalrez (Level) | | | | T |
| | Seals: NBR (ACS) | | | | H |
| | Humidity filter element for gauge version PUR and PE cable | (only for | | | Z |

(1) mH₂O, mWS, mWC etc. available

(2) Please specify the required cable length and medium

(3) For operating temperature > 50°C, FEP cable must be used

(4) min. Medium temperature -25 ° C

(5) Standard, no special cleaning. Special cleaning must be requested.


Technical drawings

Dimensions

closed version (Fig. 1)

open version (Fig. 2)

with thread (Fig. 3)

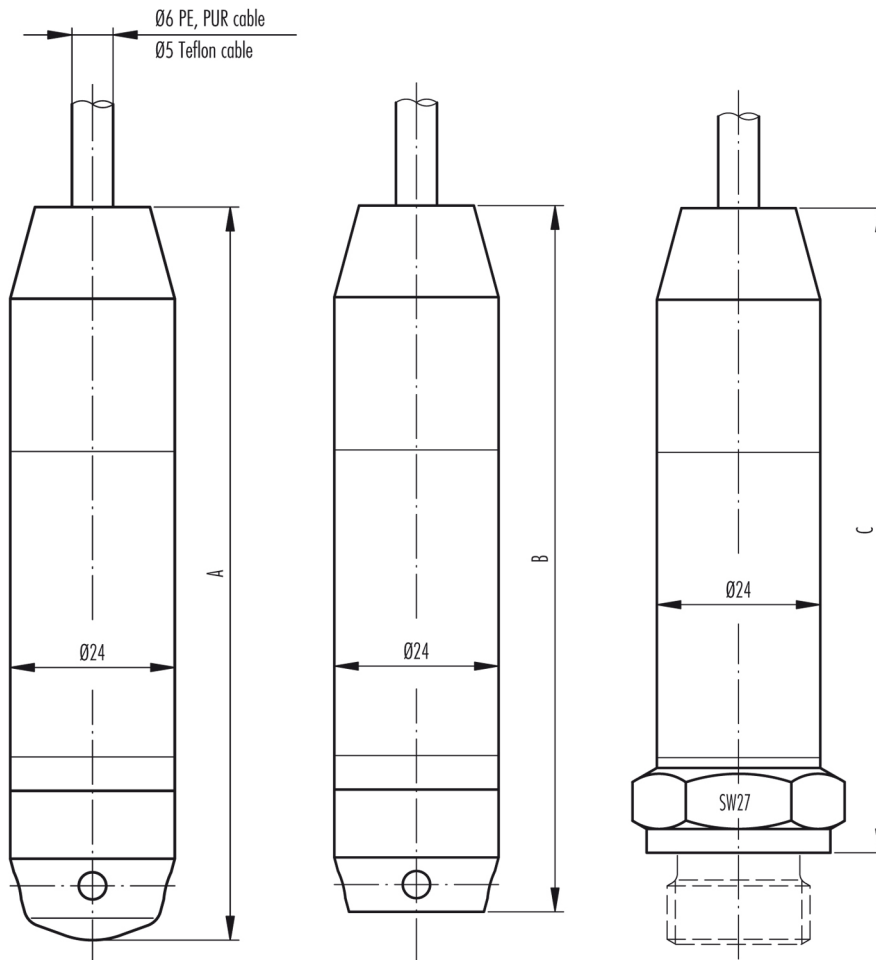

Standard and version with surge (lightning) protection

| | A [mm] | B [mm] | C [mm] | Weight [g] |
|------------------------|--------|--------|-------------|------------|
| without ballast weight | 157 | 153 | on request* | ca. 200 |
| with ballast weight | 244 | 240 | on request* | ca. 460 |

*C: Depending on process connection

| Colour | 2-wire |
|--------|--------|
| white | +Vin |
| yellow | Pout |
| grey | EP |

Specifications may change without notice.

STS Headquarters, Switzerland:
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STS France:
 STS France
 844 Route de la Caille, 74350 Allonzier la Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STS Germany:
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STS Great Britain:
 STS Great Britain Ltd.
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STS Italy:
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it